



JOB NAME _____

ADDRESS _____

DESIGNER / ENGINEER _____

CONTRACTOR _____

TEL _____

EMAIL _____

DATE _____

MODEL	AFB 25	AFB 55	AFB 80	AFB 119
QTY				

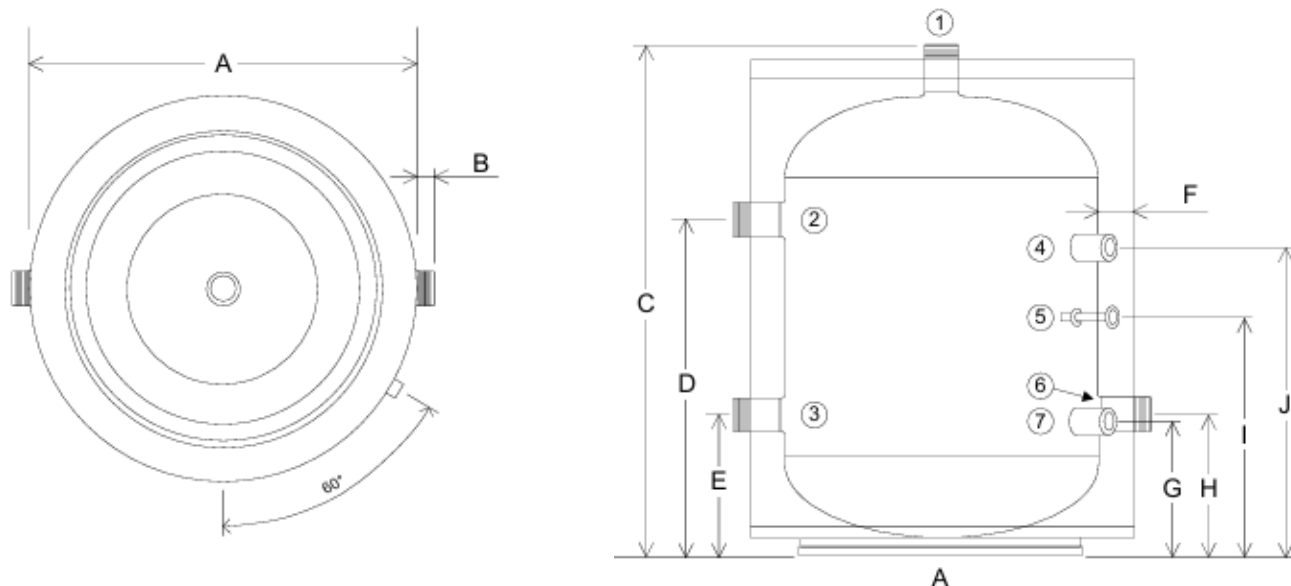
FEATURES

- AISI 444 stainless steel tank
- Galvanized and powder coated steel jacket
- Temperature sensor well
- Butt-welded construction for maximum structural integrity
- TIG-welded construction eliminates crevice corrosion risks
- Fully pickled and passivated internally and externally
- 2" thick rigid polyurethane insulation
- Dedicated recirculation connection
- Front-heating connections for flexible installation
- Factory-installed drain valve with cap

WARRANTY

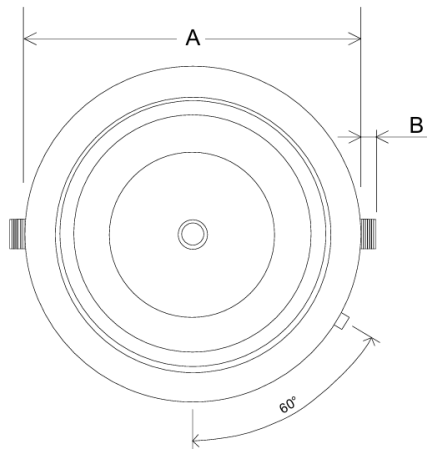
- RESIDENTIAL: 15 Years
- COMMERCIAL: 5 years

CAPACITIES	AFB 25	AFB 55	AFB 80	AFB 119
Storage Volume	23.2 / 88	52.6 / 199	79.5 / 301	112 / 424
Max Tank Working Pressure	150 Psi	150 Psi	150 Psi	150 Psi
Weight - lbs	61.7	104.7	145.5	196.2

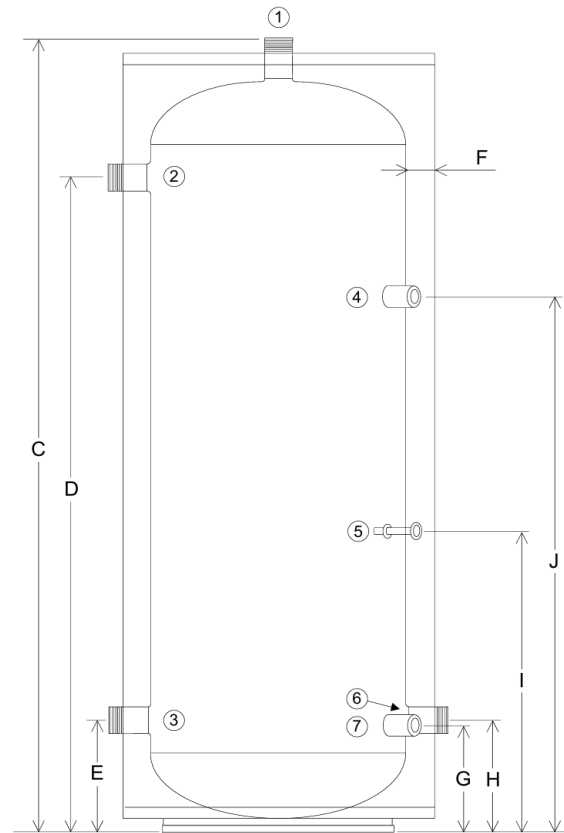
AFB 25

MEASUREMENTS (inches / cm)

	A	B	C	D	E	F	G	H	I	J
AFB 25	21.7 / 55	1 / 2.5	29.1 / 74	19 / 48.3	8 / 20.3	2 / 5	7.6 / 19.3	8 / 20.3	13.5 / 34.3	17.4 / 44.3

CONNECTIONS		AFB 25
1	Hot water outlet	1 ½" M NPT
2	Boiler supply	1 ½" M NPT
3	Boiler return	1 ½" M NPT
4	Recirculation	¾" F NPT
5	Temperature sensor well	3/8" F
6	Cold water inlet	1 ½" M NPT
7	Tank drain	¾" F NPT

AFB 55, AFB 80, AFB 119

CONNECTIONS AFB 55 / 80 / 119

1	Hot water outlet	1 ½" M NPT
2	Boiler supply	1 ½" M NPT
3	Boiler return	1 ½" M NPT
4	Recirculation	¾" F NPT
5	Temperature sensor well	3/8"
6	Cold water inlet	1 ½" M NPT
7	Tank drain	3/4" F NPT


MEASUREMENTS (inches / cm)

	A	B	C	D	E	F	G	H	I	J
AFB 55	21.7 / 55	1 / 2.5	56.7 / 144	46.6 / 118.3	8 / 20.3	2 / 5	7.6 / 19.3	8 / 20.3	21.4 / 54.3	38.1 / 96.8
AFB 80	24.5 / 62	1 / 2.5	64 / 162.6	53.3 / 135.4	8.8 / 22.4	2 / 5	8.43 / 21.4	8.8 / 22.4	22.2 / 56.4	43.5 / 110.4
AFB 119	28 / 71	1 / 2.5	65.4 / 166.2	53.9 / 137	8.8 / 24.4	2 / 5	9.2 / 23.4	8.8 / 22.4	23 / 58.4	44.1 / 112